

DISCOVER HITEMA® CUSTOMIZED APPLICATIONS

choose your customized configuration



ENR/ENRF SERIES
1,6kW ÷ 440kW

CSE SERIES
30kW ÷ 377kW


CFT SERIES
7,9kW ÷ 410kW

ENR-IR SERIES
8kW ÷ 200kW

ENRC SERIES
7,4kW ÷ 375kW

HNR SERIES
14kW ÷ 95kW
15kW ÷ 104kW

UNTIL 400KW

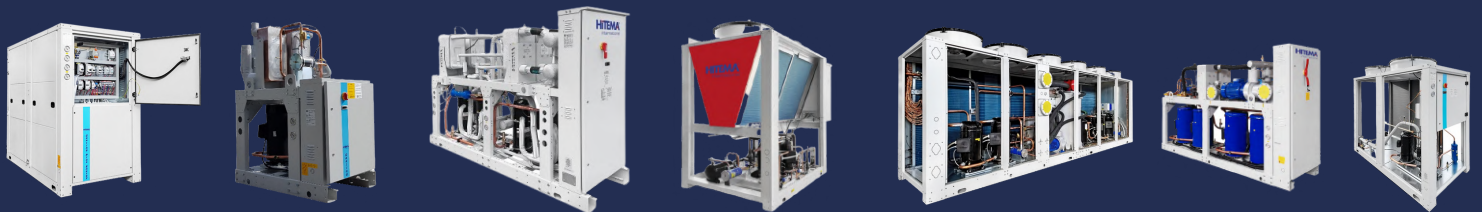

ENW SERIES
3,8kW ÷ 424kW

CFTW SERIES
50kW ÷ 371kW

HFTW SERIES
100kW ÷ 400kW
80kW ÷ 370kW

SBS-HP SERIES
61,2kW - 81,4kW -
105,8kW


HFT SERIES
16kW ÷ 345kW

CFTC SERIES
50kW ÷ 370kW

MTC SERIES
8kW ÷ 430kW

CUSTOMIZED FOR YOU

with more than 100 OPTIONS available it is easy to customized your Chillers

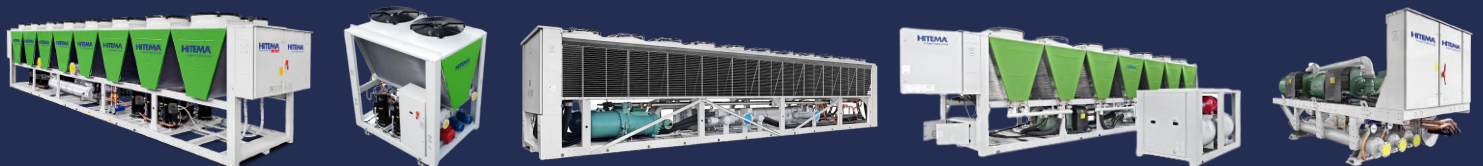

SBS/SBSF SERIES
SBSF-OPT SERIES
94kW ÷ 1288kW

SBS-MC SERIES
95kW ÷ 180kW

NOVA/NOVAF SERIES
266kW ÷ 2136kW

DTS/DTSF SERIES NEW!
ISV-ISVF SERIES
266kW ÷ 2136kW

EWB SERIES
291kW ÷ 2240kW

UNTIL 3000KW



CWB SERIES
291kW ÷ 2240kW

HBS SERIES
211kW - 750kW

TFW SERIES
250kW ÷ 3000kW

TFV/TFVF SERIES
250kW ÷ 1215kW

PRP/HPRP SERIES
130kW ÷ 520kW
55kW ÷ 330kW

HYD SERIES
400L ÷ 5000L

AVAILABLE TOOLS: price list - configurator - selection software

CSE SERIES

*Air-Cooling liquid Chillers
Centrifugal fans
IP44 protection rating
Suitable for INDOOR installation*



SERIES: ENR-ENRF-CSE CODE: GPLSPC20 CHECKED BY	DATE: 20.02.2020 UPDATE: GPLSPC19 M. Burba
--	--

HITEMA INTERNATIONAL SRL

Via Mons. G. Babolin 14, Z.I. San Gabriele
35024 Bovolenta – Padova (ITALY)

Tel. +39 (0)49 5386344 R.a. 12 lines

Fax. +39 (0)49 5386300

info@hitema.it hitema.com

Managing Director:

Maurizio Burba

burbam@hitema.it



Air-cooled liquid chillers CSE series, scroll compressors, R410A / R32 / R454B refrigerant, coaxial / shell and tube evaporator, condenser coil with copper tubes and aluminium finned fins, centrifugal fans with available air static pressure of 200Pa. Electrical feed 400V/3ph/50Hz. IP44 protection rating, chillers suitable for INDOOR installation. Inbuilt water storage tank and single pump P3 as standard.

Type of available evaporators:

CX = HITEMA coaxial evaporator, convoluted tube in tube exchanger (outer tube in carbon steel or stainless steel, inner tubes in copper) installed inside the water storage tank

ST = shell and tube evaporator, with high thickness copper tubes (0,41mm)

B-ES = stainless steel brazed plate evaporator

TECHNICAL DATA

PERFORMANCES		Model	030	038	045	061	075	100	130	160
NOMINAL COOLING CAPACITY	W 12°C/7°C @ 32°C (1)	kW	28,8	37,7	43,0	63,0	71,3	98,4	116,3	146,1
TOTAL NOMINAL ABSORBED POWER		kW	12,5	15,3	17,9	22,2	29,1	38,9	48,3	58,9
EER		kW/kW	2,58	2,87	2,73	3,21	2,68	2,70	2,66	2,69
SEPR (HT) (3)		-	4,59	5,11	5,07	5,21	4,80	4,86	4,75	4,78
NOMINAL WATER FLOW		m ³ /h	5,0	6,5	7,4	10,8	12,2	16,9	20,0	25,1
MECHANICAL MODE PRESSURE DROPS (4)		kPa	32	38	39	23	21	41	60	55
FRIGORIFIC SECTION										
COMPRESSORS / REFRIGERATING CIRCUITS / PARTITION STEP	nr.	1/1/1	1/1/1	1/1/1	2/1/2	2/1/2	2/1/2	4/2/4	4/2/4	
KIND OF EVAPORATOR	-	CX	CX	CX	CX	CX	CX	ST	ST	
HYDRAULIC SECTION										
WATER FLOW RANGE (6)	m ³ /h	4,0÷6,0	5,0÷12,0	6,0÷12,0	8,0÷18,0	10,0÷20,0	10,0÷20,0	14,0÷27,0	15,4÷31,0	
MAXIMUM PUMP ABSORBED POWER (WP OR OPTION DP)	P3 (2)	kW	1,28	2,20	2,20	2,53	2,53	2,53	4,56	4,56
MAXIMUM PUMP ABSORBED CURRENT (WP OR OPTION DP)		A	2,37	4,24	4,24	4,56	4,56	4,56	7,75	7,75
MAXIMUM PUMP ABSORBED POWER (OPTION PH OR DPH)	P5 (2)	kW	1,47	2,94	2,94	6,12	6,12	6,12	10,20	10,20
MAXIMUM PUMP ABSORBED CURRENT (OPTION PH OR DPH)		A	2,32	5,83	5,83	10,40	10,40	10,40	17,40	17,40
HYDRAULIC CONNECTIONS (THREADED / FLANGED)	BSP / DN	1 1/2"	1 1/2"	1 1/2"	2"	2"	2"	DN65	DN65	
TANK VOLUME (5)	dm ³	270	270	270	410	410	410	390	390	
EXPANSION VESSEL NUMBER x VOLUME (OPTION XV)	liters	12	12	12	19	19	19	19	19	
FAN SECTION (CENTRIFUGAL)										
FANS	nr.	2	2	2	3	3	2	3	3	
FAN SPEED REGULATION	-	ON/OFF	ON/OFF	ON/OFF	ON/OFF	ON/OFF	ON/OFF	INVERTER	INVERTER	
MAXIMUM FANS ABSORBED POWER	kW	2,20	2,20	2,20	3,30	3,30	6,00	9,00	9,00	
MAXIMUM FANS ABSORBED CURRENT	A	9,80	9,80	9,80	14,70	14,70	24,80	37,20	37,20	
TOTAL AIR FLOW	m ³ /h	13000	13000	13000	19500	19500	30000	45000	45000	
TOTAL ELECTRIC DATA										
MAXIMUM ABSORBED CURRENT (F.L.A) (6)	A	32,3	38,5	44,0	59,5	68,3	95,8	125,5	143,0	
MAXIMUM PEAK CURRENT (L.R.A) (6)	A	141,4	144,2	178,2	178,4	183,8	284,4	244,3	258,5	
MAXIMUM PEAK CURRENT WITH SOFT START (OPTION SF) (L.R.A) (6)	A	NA	NA	NA	150,6	155,8	239,4	216,5	230,5	
NOISE DATA										
SOUND PRESSURE FOR STANDARD CONFIGURATION (6) (7)	dB(A)	54,0	55,0	55,2	55,8	56,4	60,9	62,7	63,1	
SOUND PRESSURE FOR LOW NOISE CONFIGURATION (OPTION LNJ) (6) (7)	dB(A)	53,7	54,4	54,5	55,4	55,5	60,0	62,6	62,7	
DIMENSIONS AND WEIGHT										
LENGTH	mm	1610	1610	1610	2220	2220	2220	3355	3355	
WIDTH	mm	860	860	860	1100	1100	1100	1305	1305	
HEIGHT	mm	1860	1860	1860	1900	1900	2350	2350	2350	
WEIGHT EMPTY FOR STANDARD CONFIGURATION (5) (6)	kg	445	465	495	770	800	990	1315	1365	
WEIGHT OPERATIVE FOR STANDARD CONFIGURATION (5) (6)	kg	720	740	770	1190	1220	1410	1740	1800	

The manufacturer reserves the right to modify specifications without notice.

Last update: 22/07/2021
Revision: 02-2021

Data referred to:

(1) Data referred to inlet/outlet water temperature = +12/+7 °C, ambient temperature = +32°C, fluid = Water

(2) Available pressure can be calculated from Hitema Online Selection Software

(3) SEPR: data comply with the European Regulation (EU) 2016/2281, referring to high temperature process chillers

(4) Pressure drops taken in account: evaporator, valves, piping

(5) Data referred to standard chiller configuration as indicated in frigorific section, with different evaporator this data can change

(6) Data referred to standard chiller configuration WP (single pump P3)

(7) Sound pressure level referred to measures according to normative ISO3744, pressure level at distance of 10 m, referred to free field on reflecting surface

Air-cooled liquid chillers CSE series, scroll compressors, R410A / R32 / R454B refrigerant, coaxial / shell and tube evaporator, condenser coil with copper tubes and aluminium finned fins, centrifugal fans with available air static pressure of 200Pa. Electrical feed 400V/3ph/50Hz. IP44 protection rating, chillers suitable for INDOOR installation. Inbuilt water storage tank and single pump P3 as standard.

Type of available evaporators:

CX = HITEMA coaxial evaporator, convoluted tube in tube exchanger (outer tube in carbon steel or stainless steel, inner tubes in copper) installed inside the water storage tank

ST = shell and tube evaporator, with high thickness copper tubes (0,41mm)

B-ES = stainless steel brazed plate evaporator

TECHNICAL DATA

PERFORMANCES		Model	185	230	280	340	370
NOMINAL COOLING CAPACITY	W 12°C/7°C @ 32°C (1)	kW	174,0	228,3	278,8	324,4	362,5
TOTAL NOMINAL ABSORBED POWER		kW	65,1	86,7	109,4	123,5	140,8
EER		kW/kW	2,87	2,91	2,76	2,82	2,78
SEPR (HT) (3)		-	5,15	5,25	4,95	5,06	5,02
NOMINAL WATER FLOW		m ³ /h	29,9	39,2	47,9	55,7	62,3
MECHANICAL MODE PRESSURE DROPS (4)		kPa	62	61	62	53	58
FRIGORIFIC SECTION							
COMPRESSORS / REFRIGERATING CIRCUITS / PARTITION STEP	nr.	4/2/4	4/2/4	4/2/4	4/2/4	4/2/4	
KIND OF EVAPORATOR	-	ST	ST	ST	ST	ST	
HYDRAULIC SECTION							
WATER FLOW RANGE (6)	m ³ /h	21,0÷40,0	25,0÷46,0	31,0÷58,0	38,0÷70,0	45,0÷80,0	
MAXIMUM PUMP ABSORBED POWER (WP OR OPTION DP)	P3 (2)	kW	4,56	8,30	8,30	8,30	10,20
MAXIMUM PUMP ABSORBED CURRENT (WP OR OPTION DP)		A	7,75	14,10	14,10	14,10	17,40
MAXIMUM PUMP ABSORBED POWER (OPTION PH OR DPH)	P5 (2)	kW	10,20	16,22	16,22	16,22	16,22
MAXIMUM PUMP ABSORBED CURRENT (OPTION PH OR DPH)		A	17,40	26,60	26,60	26,60	26,60
HYDRAULIC CONNECTIONS (THREADED / FLANGED)	BSP / DN	DN65	DN80	DN100	DN100	DN100	
TANK VOLUME (5)	dm ³	390	500	500	500	500	
EXPANSION VESSEL NUMBER x VOLUME (OPTION XV)	liters	19	19	19	19	19	
FAN SECTION (CENTRIFUGAL)							
FANS	nr.	3	4	5	6	6	
FAN SPEED REGULATION	-	INVERTER	INVERTER	INVERTER	INVERTER	INVERTER	
MAXIMUM FANS ABSORBED POWER	kW	9,00	12,00	15,00	18,00	18,00	
MAXIMUM FANS ABSORBED CURRENT	A	37,20	49,60	62,00	74,40	74,40	
TOTAL AIR FLOW	m ³ /h	45000	60000	75000	90000	90000	
TOTAL ELECTRIC DATA							
MAXIMUM ABSORBED CURRENT (F.L.A) (6)	A	165,0	209,5	254,5	296,3	329,0	
MAXIMUM PEAK CURRENT (L.R.A) (6)	A	309,0	398,0	481,9	547,0	579,7	
MAXIMUM PEAK CURRENT WITH SOFT START (OPTION SF) (L.R.A) (6)	A	274,2	353,0	427,5	485,0	517,7	
NOISE DATA							
SOUND PRESSURE FOR STANDARD CONFIGURATION (6) (7)	dB(A)	63,2	65,0	66,4	66,8	66,8	
SOUND PRESSURE FOR LOW NOISE CONFIGURATION (OPTION LNJ) (6) (7)	dB(A)	62,8	64,0	64,7	65,3	65,4	
DIMENSIONS AND WEIGHT							
LENGTH	mm	4355	5350	5350	6350	6350	
WIDTH	mm	1305	1305	1305	1305	1305	
HEIGHT	mm	2350	2350	2350	2350	2350	
WEIGHT EMPTY FOR STANDARD CONFIGURATION (5) (6)	kg	1730	2245	2395	2725	2910	
WEIGHT OPERATIVE FOR STANDARD CONFIGURATION (5) (6)	kg	2170	2800	2955	3305	3510	

The manufacturer reserves the right to modify specifications without notice.

Last update: 22/07/2021
 Revision: 02-2021

Data referred to:

(1) Data referred to inlet/outlet water temperature = +12/+7 °C, ambient temperature = +32°C, fluid = Water

(2) Available pressure can be calculated from Hitema Online Selection Software

(3) SEPR: data comply with the European Regulation (EU) 2016/2281, referring to high temperature process chillers

(4) Pressure drops taken in account: evaporator, valves, piping

(5) Data referred to standard chiller configuration as indicated in frigorific section, with different evaporator this data can change

(6) Data referred to standard chiller configuration WP (single pump P3)

(7) Sound pressure level referred to measures according to normative ISO3744, pressure level at distance of 10 m, referred to free field on reflecting surface